

**F2010-A-009**

## **ENHANCEMENT POTENTIAL OF THE THERMAL CONVERSION EFFICIENCY OF ICE CYCLES BY USING OF A REAL ATKINSON CYCLE IMPLEMENTATION AND (VERY) HIGH PRESSURE TURBO CHARGING**

Gheorghiu, Victor \*

Hamburg University of Applied Sciences, Germany

**KEYWORDS** – Efficiency, CO<sub>2</sub>-Reduction, Atkinson Cycle Implementation, High Pressure Turbocharging, Modelling and Simulation

### **ABSTRACT**

Most recent implementations of the Atkinson cycle are not ideal from the point of view of thermal conversion efficiency (**TCE**). For example, Toyota has put a gasoline engine into its Prius II which should achieve high efficiency by using a modified Atkinson cycle based on variable intake valve timing management. Firstly, this implementation of the Atkinson cycle is not the ideal solution because some of the air is first sucked from the intake manifold into the cylinder and subsequently returned back there. As a consequence, the oscillating air stream reduces the TCE of this cycle to a considerable extent. Secondly, this implementation of the Atkinson cycle only reaches low levels of indicated mean pressure (**IMEP**) and, thirdly, it is not suitable for part-load engine operating points (**EOP**) due to the lower TCE. For these reasons, this implementation of the Atkinson cycle is suitable only for hybrid vehicles, where the engine – because it is not directly linked mechanically to the wheels – works only in its best EOP.

In this paper the losses in TCE of internal combustion engines (**ICE**) – especially for the Atkinson cycles – are analyzed in detail and a proposal is made for their reduction for aspirated and especially for high-pressure supercharged engines.

### **INTRODUCTION**

The principal purpose of this investigation is to discover new ways for implementing the Atkinson cycle, which simultaneously enables the enhancement of TCE and IMEP under stoichiometric AFR and lower pressure and temperature peaks during the cycle.

In conventional ICE, because the volumetric compression and expansion strokes are virtually identical and the cylinder filling is complete, the effective compression ratio and the effective expansion ratio are basically identical, as shown on the left side of Fig. 1, for the modified Seiliger cycle (an ideal model of engine cycles).


In the classic Seiliger cycle (2), or limited pressure cycle (1) the heat is released by constant volume ( $V$ ) and constant pressure ( $p$ ). For this reason, this cycle is referred to here as the  $V, p$ -cycle. In the modified Seiliger cycle, (see left side of Fig. 1) the heat is released by constant volume, constant pressure and constant temperature and, accordingly, this cycle can be referred to as the  $V, p, T$ -cycle. In this way, it becomes possible to generate ideal cycles which model the real ICE cycles more accurately by observing their mechanical and thermal limits.

In the Atkinson cycle (see right side of Fig. 1), the effective compression stroke is shorter and the effective compression ratio is higher than those of the Seiliger cycle, so that the pressure

at the end of the compression strokes reaches the same level in both cycles. In this case, the Atkinson cycle has a higher TCE than the Seiliger cycle.

The following operations are the usual ways (see (1), (2)) to increase the TCE of the Seiliger cycle:

1. Increasing the effective volumetric compression ratio (VCR).
2. Shortening the effective compression stroke, for example by delaying intake valve closing.
3. Completing the effective expansion stroke, for example by delaying the exhaust valve opening.
4. Enhancement of turbocharging level for a concurrent increase in TCE and indicated mean pressure.

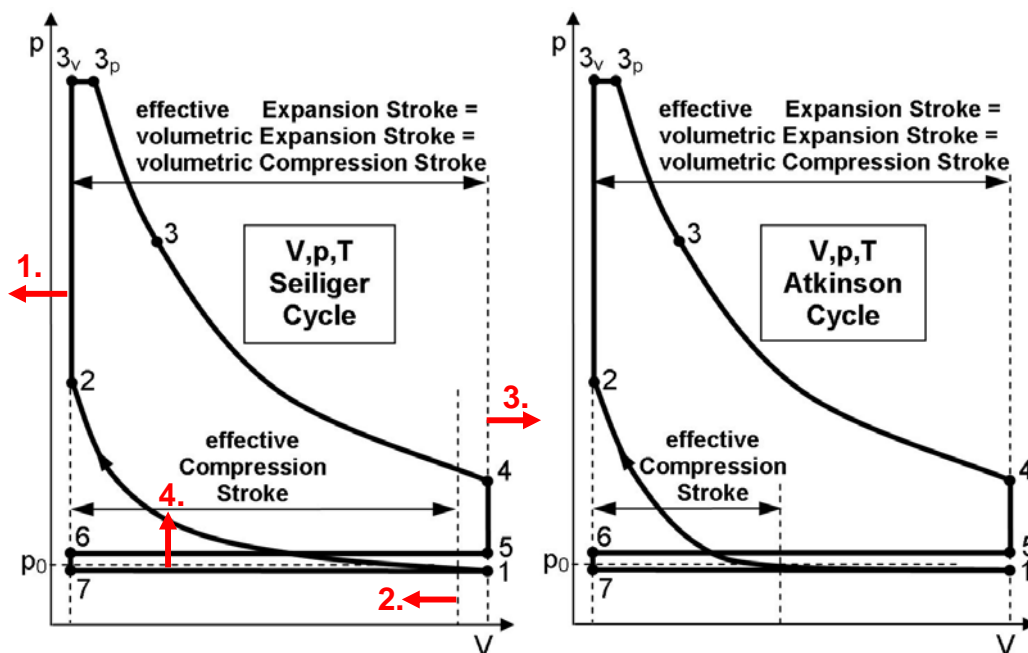

**Figure 1.** Schematic Pressure-Volume Diagrams of the Classic Four-Stroke Seiliger and Atkinson Cycle

In conclusion, these ways of increasing the TCE of the classic Seiliger cycle (marked by arrows on the left side of Fig. 1) lead to both aspirated and turbocharged engines from Seiliger to Atkinson cycle and result in the following implications, limitations and restrictions:

The first and fourth ways lead to higher pressure and temperature peaks during the cycle, which increase the thermal and mechanical strain on engine parts. The occurrence of knocking is a frequent outcome in the case of gasoline engines. The high temperature favors the production of NOx in the cylinders of both gasoline and diesel engines. The second way leads to a decreased mass of retained gas in the cylinder, especially in the case of aspirated engines.


As a consequence, the IMEP achieves only low levels and engines with a higher displacement are necessary, the mechanical losses rise, and, finally, the increase in TCE is lost. The third way leads to engines with large displacement and consequently higher mechanical losses, when the volumetric expansion stroke increases while the compression stroke remains unchanged.

# 1. ATKINSON CYCLE IMPLEMENTATIONS TO ICE WITH CLASSIC CRANKSHAFT DRIVE

## 1.1 Analysis of Atkinson Cycle Implementation for Aspirated ICE in Variant 2V


For example, Toyota uses an SI engine in its Prius II which tries to achieve high efficiency by using an Atkinson cycle, where the intake valve is kept open for a large part of the compression stroke and the volumetric compression ratio is enhanced (3).

This implementation of the Atkinson cycle (named second variant or **2V**) is compared with the classic Seiliger cycle (named standard variant or **SV**), and the results are presented in Figures 2 to 5. The third implementation variant of Atkinson cycle (**3V**) drawn in these Figures will be presented and discussed below. These three variants are described and evaluated in detail in (4) by using the simulation method and tool presented in (5) and (6). In these variants, the air-fuel ratio (**AFR**) is kept stoichiometric, the cylinder walls are adiabatic and the thermo and fluid dynamical processes are reversible to make comparison easier. In the initial stage of the compression stroke in 2V, due to the delayed intake valve close (**ic**), some of the air that had entered the cylinder is returned to the intake manifold, in effect delaying the start of compression (see B areas in Fig. 3 and 4). In this way, the effective compression ratio is decreased without altering the expansion ratio. The oscillating air stream from and to the intake manifold through the intake valve port considerably reduces the TCE and the indicated fuel conversion efficiency (**IFCE**) of the cycle (see B areas in Fig. 4 and 5). The pushing out of residual gases during the exhaust stroke consumes more piston work in the Atkinson cycle because of lower pressure (see Fig. 2) at the exhaust valve opening (**eo**) and consequently of the sluggish cylinder emptying (see A areas in Fig. 4 and 5).

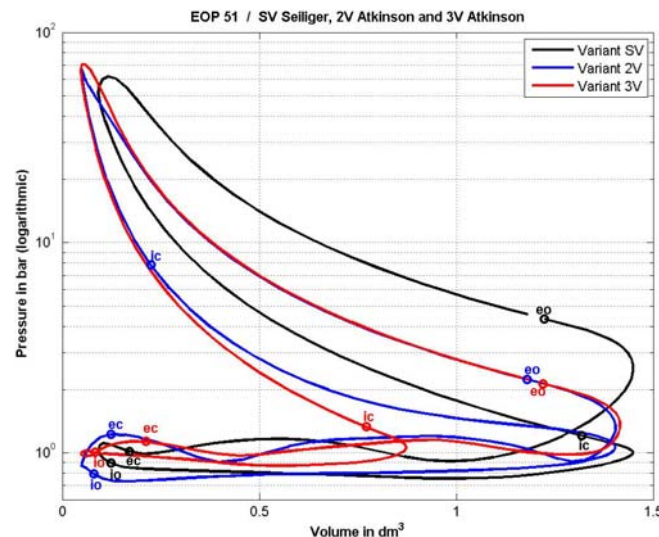


**Figure 2.** Pressure (Logarithmic) –Volume Diagram


One can conclude that the TCE gain of this kind of Atkinson cycle implementation (i.e. 2V) is modest and largely dependent on the fine-tuning of all parameters (valve timing, etc.). The major TCE improvement in the case of Prius II is obtained by means of shifting the EOP in areas with greater TCE. In addition, the specific power or IMEP of the engine is low because of the lower retained mass of fresh charge in cylinder before compression (see Fig. 3). This means a relatively large (due to the large displacement) and therefore heavy engine is needed to power the vehicle.

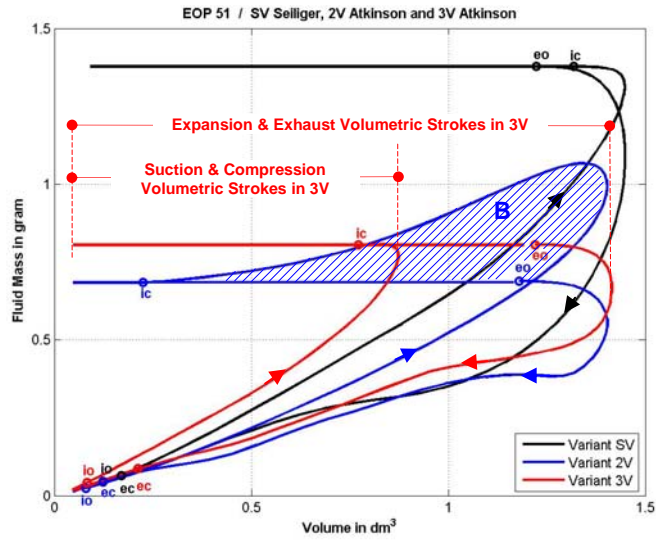

**Figure 3.** Fluid Mass-Volume Diagram

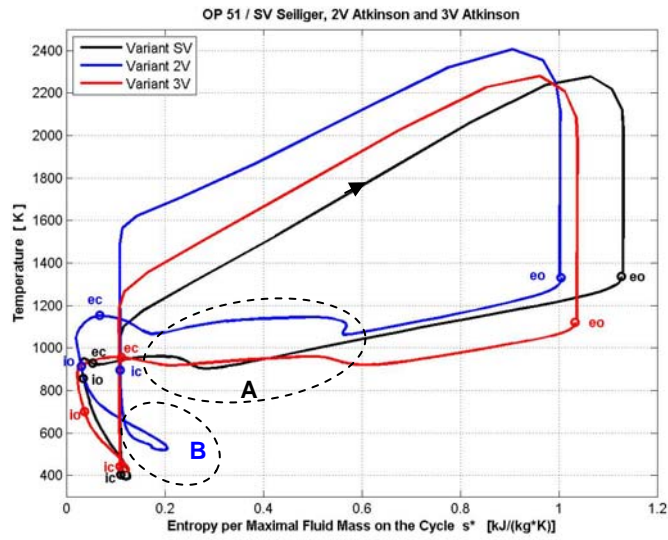

**Figure 4.** Temperature-specific\* Entropy Diagram (T, s\*)

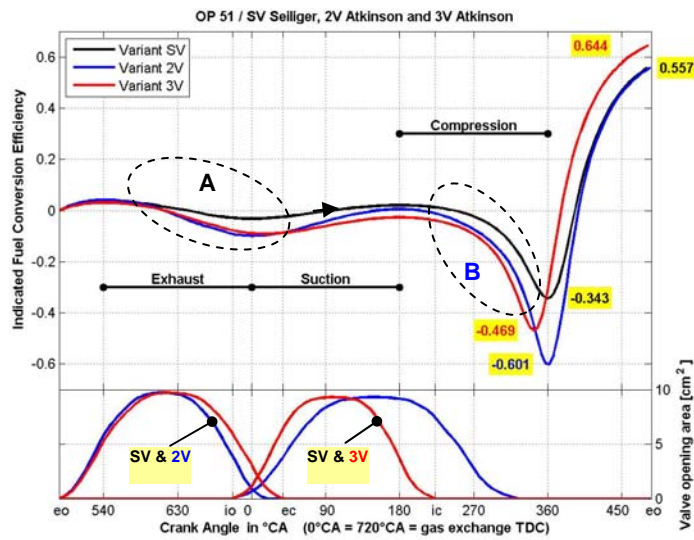


**Figure 5.** IFCE – Crank Angle Diagram

For these reasons, this implementation of the Atkinson cycle is suitable only for hybrid vehicles, where the engine – because it is not directly linked mechanically to the wheels – works only in its best operating range (3).

## 1.2 Analysis of Classic Atkinson Cycle Implementation for Supercharged ICE in Variant 1V-TC

The first item analyzed here is the commonly used practice of concomitant suction delay and an increase in boost pressure. The number of parameters influencing the TCE of supercharged engines becomes much higher compared to aspirated engines. As a consequence, a greater effort is required to achieve combinations of parameters which maximize the TCE or IFCE of such engine cycles (8).

One of the simulation tools used here is the BOOST®, from AVL Co. The BOOST model used for the following implementations is presented in Figure 6, where the six cylinders of the modelled engine are identical.

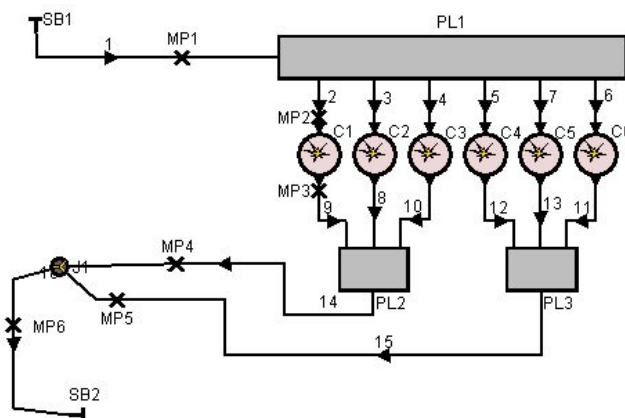


**Figure 6.** Simple BOOST Model of a Supercharged 6-Cylinder Diesel Engine

The following options were selected for all following simulations of the Seiliger and Atkinson cycles:

- The goal is to reach the greatest possible TCE or IFCE and the IMEP at the same time, without exceeding the given mechanical and thermal limits.
- The VCR for Seiliger (variant **SV-TC**) and Atkinson (in variant **1V-TC**) cycles is kept identical (see Fig. 7).
- The heat transfer to the cooling system is switched off in order to enable an easier comparison between cycles and variants, as done previously in (4) and (8).
- The heat release function is modelled with the help of a simple Vibe function (identical for all simulations).
- The mechanical and thermal limits are kept identical (approx. 210 bar and 2050 K) in both cycles and all of the simulation variants, as done previously in (8).
- In order to reach the same limits for pressure and temperature in both cycles, the charge pressure  $p_C$  is adjusted accordingly.
- The charge temperature is kept identical for all simulations ( $T_C = 350$  K), as done previously in (8).
- The supercharging level is simulated by setting the state of the boundary element SB1 and the pressure before the turbine by setting the state of the boundary element SB2 (see Fig.


6). In this instance, the turbocharger and the intercooler are no longer required to be modelled in detail and, in addition, comparability is assured between various simulations for both cycles.

- If possible, the AFR ( $\lambda$ ) should be kept identical in order to compare the cycles under the same operating conditions.
- The parameters compared here are TCE ( $\eta_{th}$ ) or IFCE ( $\eta_i$ ), IMEP, retained mass in cylinder ( $m_a$ ) and pressure ( $p_{ic}$ ) and temperature ( $T_{ic}$ ) when the intake valve closes (**ic**) in both cycles.

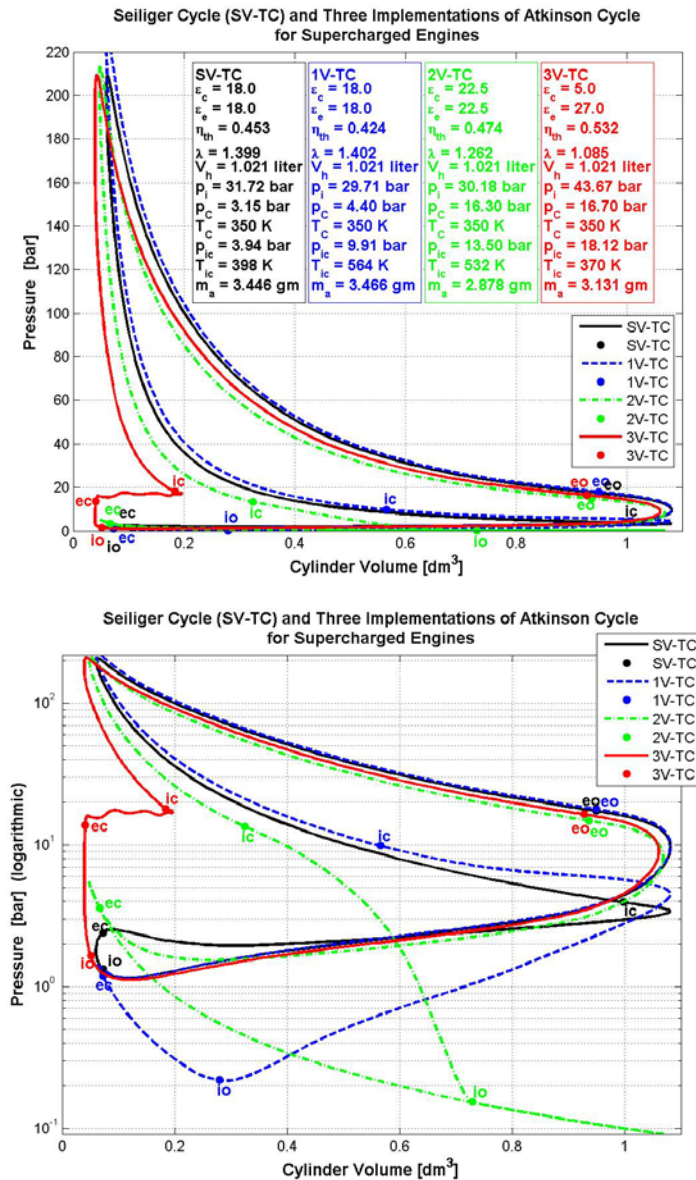


**Figure 7.** Pressure-Volume Diagrams

The simulation results for the 1V-TC of Atkinson cycle implementation, where the intake valve closing is  $60^\circ\text{CA}$  delayed, are presented in Figures 7 to 10. Due to the delay in suction, the gas exchange processes are very different from the SV-TC of the Seiliger cycle. The boost in pressure is increased by the same filling rate of the cylinder (see Fig. 9) to achieve nearly the same IMEP.

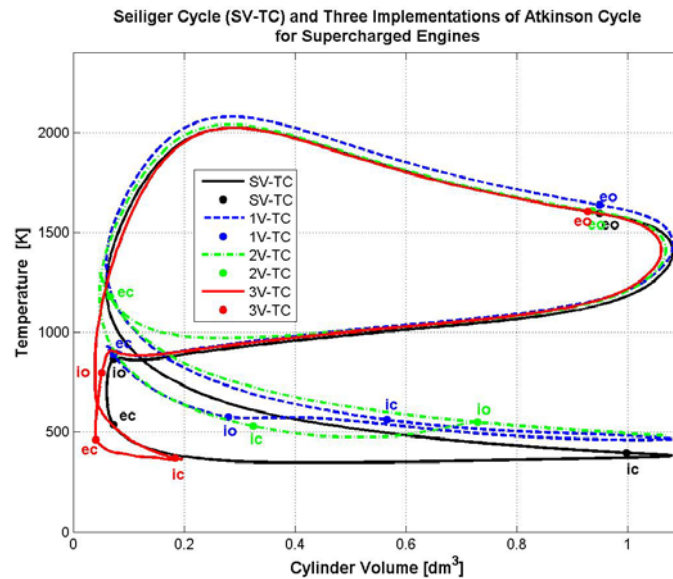

**Figure 8.** Pressure-Temperature Diagrams

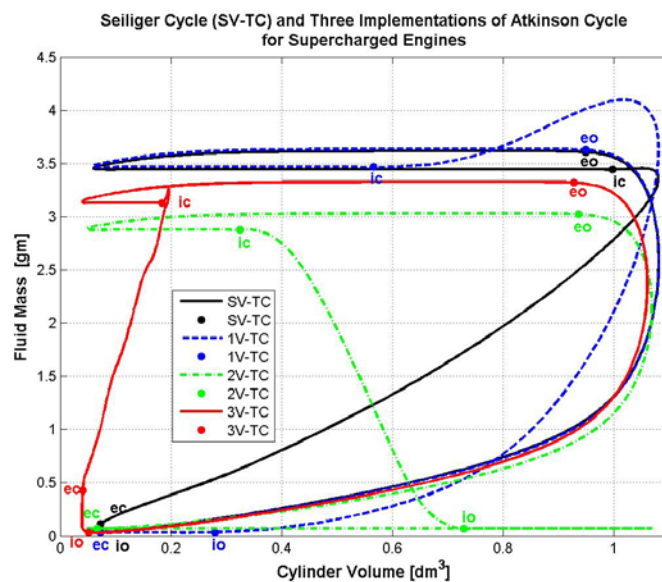


**Figure 9.** Fluid Mass-Volume Diagrams

At the beginning of the intake stroke, the pressure in the cylinder decreases significantly because the intake valve is not yet open at this time (see Fig. 7). The IFCE level is therefore lower than in the SV-TC (see Fig. 10). Toward the end of suction, when the return flow is carried to the inlet pipe (see Fig. 9 and 10), the IFCE level becomes much lower than in the standard version (see Fig.10).

In short, although in the 1V-TC of the Atkinson cycle implementation the boost pressure is 40% higher, TCE or IFCE and IMEP are 6% lower than in the standard version of the Seiliger cycle. For these reasons, a new approach is needed to implement the Atkinson cycle with a normal crankshaft drive.

As a following attempt here a test should be done on the IFCE improvement potential of an engine where a very high-pressure supercharging and a high value of the VCR are used simultaneously. The usual reduction of the VCR for meeting the mechanical and thermal

limitations, when very high-pressure supercharging is used for an engine with classic crank drive, implies diminishing IFCE performance.

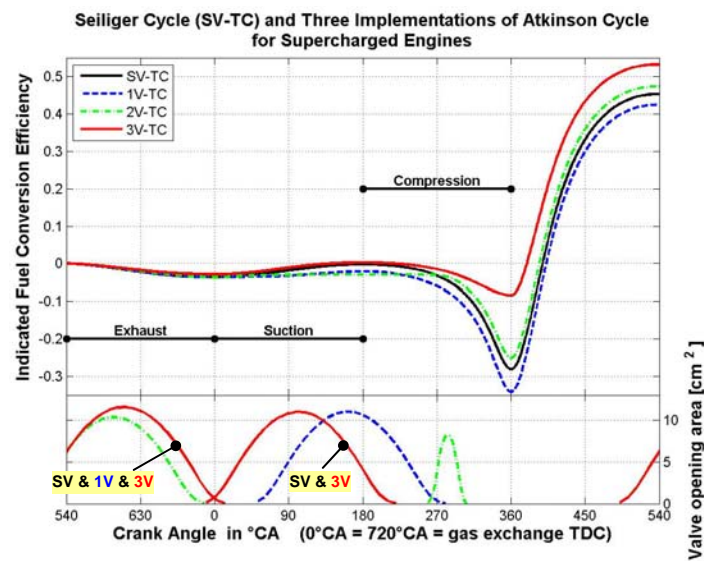

**Figure 10.** IFCE-Crank Angle Diagrams

### 1.3 Analysis of Atkinson Cycle Implementation with Very High Charge Pressure in Variant 2V-TC

In the 2V-TC implementation of the Atkinson cycles, the suction is much more delayed and a very high charge pressure (of more than 16 bars) is considered. As a result of the delayed suction, less mass is aspirated into the cylinder (see Fig. 9). To improve the IFCE of this Atkinson cycle, the VCR is increased by 22% compared to the SV-TC of the Seiliger cycle. The special characteristics of the 2V-TC are: a) the remaining gases are expanded during suction stroke and then compressed as in the Miller cycle (see e.g. (7)) and b) the suction of fresh charge starts first, after the full completion of the suction in the SV-TC, and takes a very short time.

Unfortunately, in order to achieve the same maximum values of pressure and temperature on both cycles at virtually the same IMEP, the AFR must be adapted in this case. The placement of the combustion phase on the cycle is identical to the SV-TC of the Seiliger cycle. The simultaneous matching of all the parameters (i.e. maximum values of pressure and temperature, IMEP and AFR) is very difficult to achieve. The difference between the AFR ( $\lambda$ ) values of both cycles (see parameter boxes from Fig. 7) is quite low.

During exhaust, there are no major differences in IFCE between the cycles (see Fig. 10). The significant influence of the decrease in compression work in the 2V-TC of Atkinson cycle can be seen clearly after the intake valve is closed.


In short, it can be seen that this implementation of the Atkinson cycle is somewhat more efficient than the Seiliger cycle. One can expect that the improvement in IFCE for the 2V-TC of Atkinson cycle, compared to the standard Seiliger cycle, will be somewhat better if the AFR is kept identical in both cycles. Although the boost pressure in the 2V-TC of Atkinson cycle implementation is more than five times higher at nearly the same IMEP, one sees only a minor improvement in the IFCE. Hence, the implementation of the Atkinson cycle by means




of a significant delay of the suction and a strong enhancement of the charge pressure applied to a classic Seiliger cycle does not represent a suitable solution. Therefore, a new approach is needed to implement a real Atkinson cycle.

## 2. STRICT ATKINSON CYCLE IMPLEMENTATIONS TO ICE WITH ASYMMETRICAL CRANKSHAFT DRIVE

The goal of the present investigation is to attempt to propose better implementations of the Atkinson cycle in accordance with the previously presented restrictions.

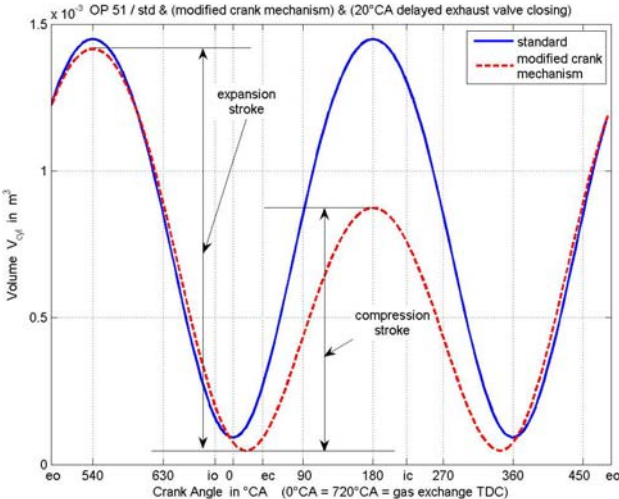

**Figure 11.** Relative Piston Displacement – CA Diagram of an Asymmetrical Crank Mechanism with Constant VCR for an Aspirated Engine (4)

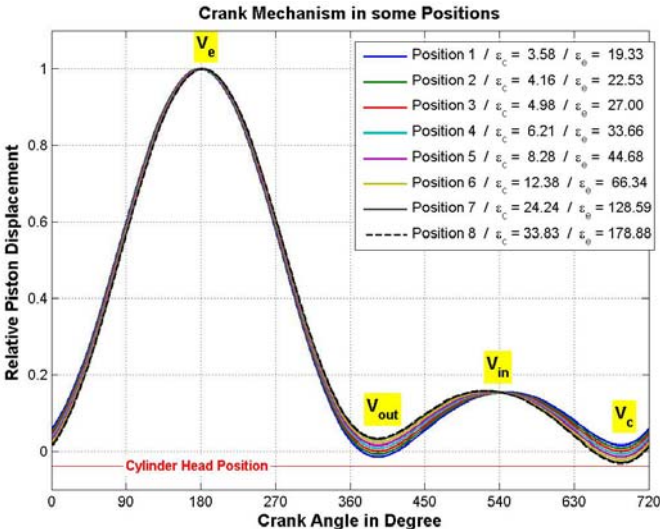

**Figure 12.** Relative Piston Displacement – CA Diagram of an Asymmetrical Crank Mechanism with Variable VCR

In order to realize a strict Atkinson cycle - i.e. shortened compression and extended expansion - a special crankshaft drive is proposed which permits geometrically different strokes for compression and expansion (see Fig. 11 for aspirated engines (4) and Fig. 12 for supercharged engines (8)). The design of this crankshaft drive is not the subject of this investigation and is

therefore not described here. Its mechanical efficiency is estimated to be more than 96%. Many crank mechanisms with asymmetrical strokes are already patented in several variants, or have reached the stage of application for a patent.

## 2.1 Analysis of Atkinson Cycle Implementation for Aspirated ICE in Variant 3V

An analysis of the simulation results from (4) for the implementation of a real Atkinson cycle in 3V shows that a 15% increase in IFCE (see Fig. 5) can be achieved in comparison to the standard Seiliger cycle (SV). The backflow to the intake manifold through the intake valve port at the beginning of compression can be eliminated with shortened suction and compression strokes (see Fig. 3). An analysis of the  $T,s^*$  diagrams from Figure 4 reveals why the TCE or IFCE are higher in the 3V than in the 2V and SV variants. The only factor which could have contributed to this is the elimination of the back and forth streaming through the intake valve, since no other changes or parameter optimizations were made compared to the 2V of Atkinson cycle implementation.

## 2.2 Analysis of Atkinson Cycle Implementation to ICE with Very High Charge Pressure in Variant 3V-TC

In the SV-TC implementation of the Seiliger cycle the expansion and compression ratios are identical. In the 3V-TC implementation of the Atkinson cycle, the crank mechanism from Figure 12 in Position 3, the chosen parameters are a very low compression ratio, a very high boost pressure  $p_C$  and a virtually stoichiometric AFR ( $\lambda$ ) (see parameter boxes from Fig. 7 for this variant). In this way, the full potential of turbo charging can be used without exceeding the maximum pressure (in this case  $p_{\max} = 210$  bar) and temperature (in this case  $T_{\max} = 2050$  K) of the cycle (see Fig. 7 to 9).

The charge pressure in the 3V-TC implementation of the Atkinson cycle is unusually high. Such turbo charging systems are not typical at this time for ICE because the maximum pressure on the cycle severely limits the level of charge pressure in classic applications (here SV-TC). For this reason, the current classic, highly supercharged diesel engines must decrease sharply either the VCR or the aspirated air mass (classic Atkinson and Miller cycle, see e.g. (7)) in order to avoid exceeding the maximum pressure during the cycle. These restrictive measures limit the TCE or IFCE of these cycles substantially.

Consequently, our search in this paper has been for ways to make better use of the enthalpy of exhaust gases. In the case of stoichiometric AFR this enthalpy is more than enough to provide the compression of the fresh charge up to the very high pressure ( $p_C$ ) of the 3V-TC of the Atkinson cycle implementation from Figures 7 to 10. On the other hand, the temperature of the fresh charge ( $T_C$ ) must be kept low by means of intensive cooling after each turbo compressor stage. The high level of  $p_C$ , the low level of  $T_C$  and the reduced piston work for compression considerably increase the TCE or IFCE on this Atkinson cycle. In addition, the piston work for gas exchange processes becomes very positive, i.e. this piston work is supplied for this Atkinson cycle implementation instead of being consumed as in the case of the SV-TC of Seiliger cycle (see Fig. 7 and 10).

As a result, the TCE of the 3V-TC of the Atkinson cycle is more than 17% greater than that of the SV-TC of the Seiliger cycle. At the same time, the indicated mean pressure ( $p_i$  or IMEP) of the 3V-TC of the Atkinson cycle exceeds that of the SV-TC of Seiliger cycle by more than 37%, while meeting the same mechanical and thermal limits in both cycles (see Fig. 7 to 10).


It should be noted here that as the AFR cannot be kept identical in both simulated cycles, these cycles correspond to different engine operating conditions. As a consequence, the effort to achieve combinations of parameters which maximize the TCE of the real ICE cycle of supercharged engines, while keeping identical thermal and mechanical limits, AFR respectively operating condition, charge pressure and temperature etc. becomes much more difficult.

Consequently, ideal models of the V,p,T-Seiliger and -Atkinson cycles are developed for this purpose (see Appendix (8) for theoretical background). Simulations with BOOST (as real models of ICE cycles) are used in (8) for reference in order to evaluate the accuracy and validate the prediction accuracy of these ideal models on the TCE. The purpose of the BOOST simulations from (8) was not to obtain a perfect overlapping of the curves, but rather to demonstrate that the proposed V,p,T-model is able to produce good results and accurate predictions of the influence that many parameters have on the TCE without a major computing effort.


### 2.3 Analysis of Atkinson Cycle Implementations to ICE with Very High Charge Pressure over all EOP using the Ideal V,p,T - Model

The implementation of the Atkinson cycle by means of the asymmetrical crank drive has the disadvantage that at part loads - because of the very extensive expansion - the cycle stops being feasible, i.e. the pressure at the end of expansion becomes lower than the ambient pressure (see requirements for cycle realization from Appendix (8)). For this reason, the crank drive should also enable the variation of the VCR, as presented in Figure 12.


Using such a crank mechanism, it is possible to realize Atkinson cycles for part loads even with stoichiometric AFR and without throttling. For example, the pressure-volume and temperature-specific entropy ( $T,s^*$ ) diagrams for Position 1 of the crank mechanism from Figure 12 at full and many part loads are presented in Figures 13 and 14. The best TCE is reached for a boost pressure of ca. 10 bar. For this position of the crank mechanism and for the stoichiometric AFR, the limits for the boost pressure are between 2 and 34 bar. For the other positions of the crank mechanism, these limits are different.

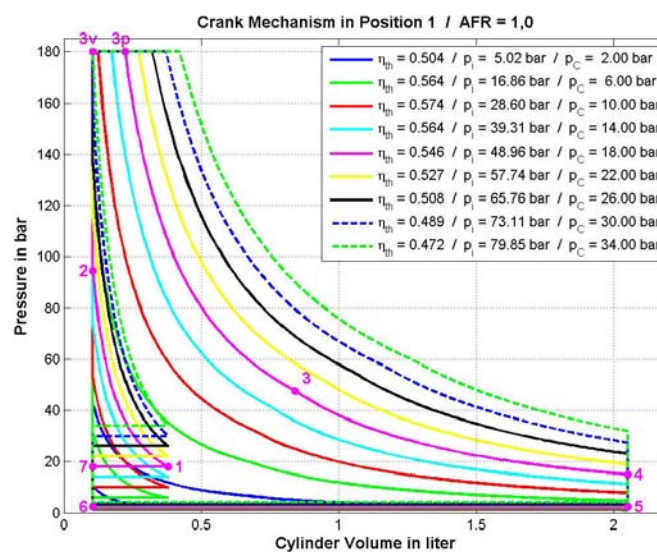

**Figure 13.** Pressure-Volume Diagrams for Crank Mechanism in Position 1, at many Loads, AFR = 1

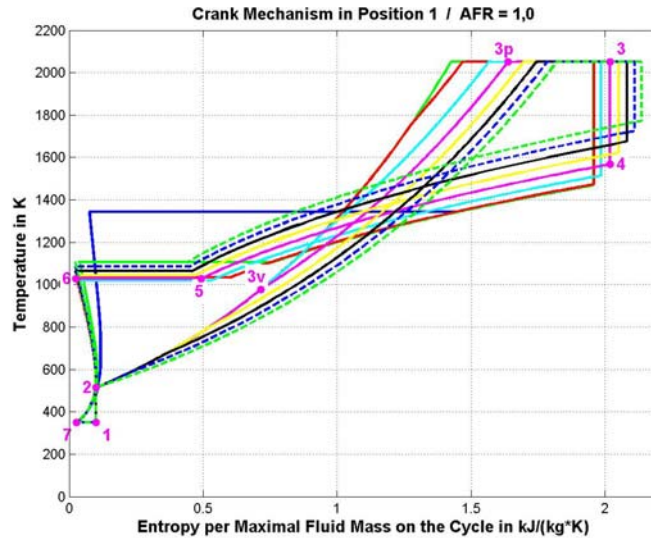


**Figure 14.** Temperature-Entropy per maximal Fluid Mass Diagrams ( $T,s^*$ ) for the Crank Mechanism in Position 1, at many Loads, AFR = 1

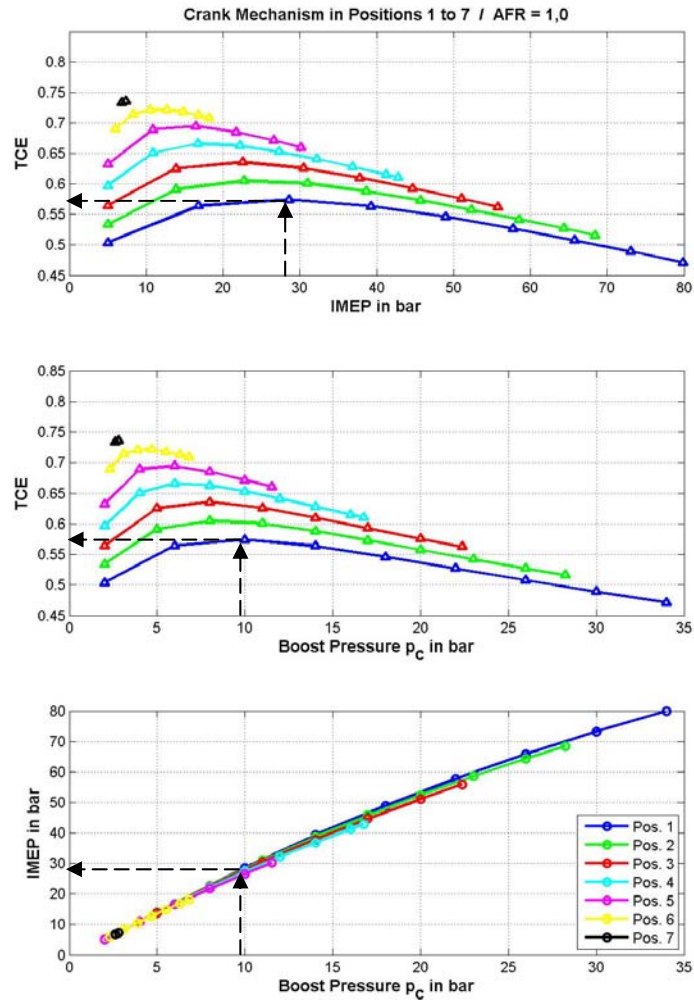

**Figure 15.** Correlation between TCE, IMEP, Boost Pressure and Crank Mechanism Positions at Full and many Part Loads with Stoichiometric AFR

The states 1 to 7 marked on the magenta cycle in the three diagrams in Figure 13 correspond to an 18 bar boost pressure. The red cycle corresponds to a 10 bar boost pressure and has the best TCE for this crank mechanism position. The  $T_{,s^*}$  diagram from Figure 14 confirms that this cycle has the highest TCE.

Figure 15 depicts the correlations between TCE, IMEP, boost pressure and crank mechanism positions for the stoichiometric AFR. The arrows show such correlation for position 1 of the crank mechanism where the TCE reaches its maximum. The boost pressure was not limited to the current usual maximum values in these simulations. Whether or not such high boost pressure values are at present achievable is not the subject of this investigation and is therefore not discussed here.

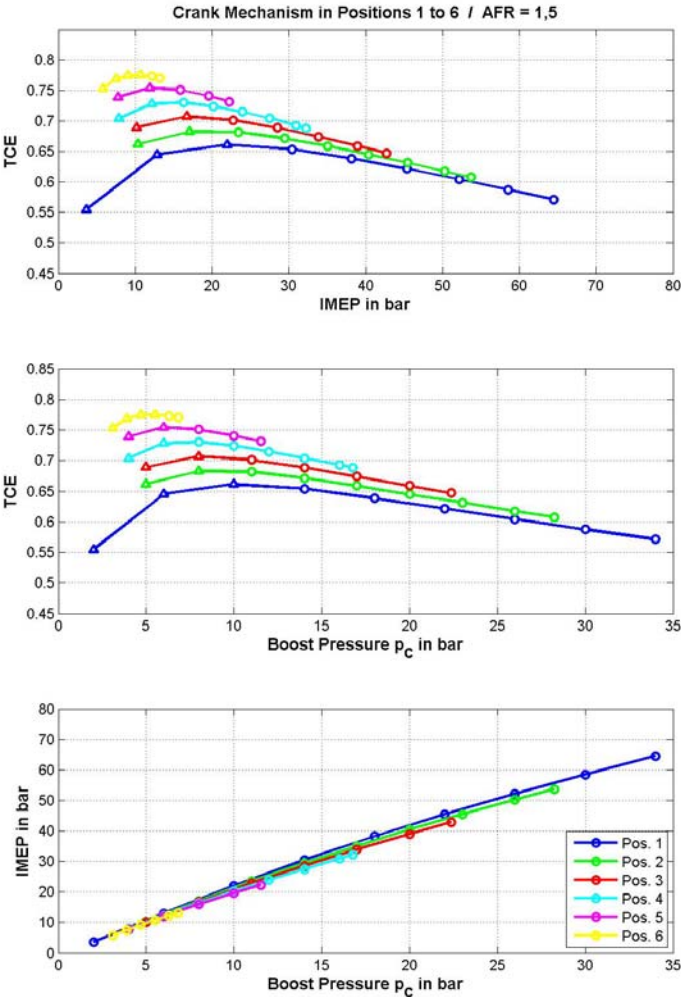


**Figure 16.** Correlation between TCE, IMEP, Boost Pressure and Crank Mechanism Positions at Full and many Part Loads with AFR = 1.5

An imaginary curve, which tops all the TCE-IMEP curves in Figure 15, shows that the TCE remains much higher than 60% in the case of IMEP values ranging between 5 and 40 bar for stoichiometric AFR, when the crank mechanism position is changing continuously from 7 to 4 and the boost pressure changes accordingly between 2 and 15 bar.

The increase in the AFR from 1 (i.e. stoichiometric) to 1.5, for example, should theoretically improve the TCE values because the load decreases. That behaviour is confirmed in Figure 16. As less heat is available in the cycle when AFR = 1.5, this heat may only be released

isochorically and isobarically without exceeding the limits  $p_{max}$  and  $T_{max}$ . As a result, the TCE values are higher for this lean mixture than in the stoichiometric case (see Fig. 15 and 16).

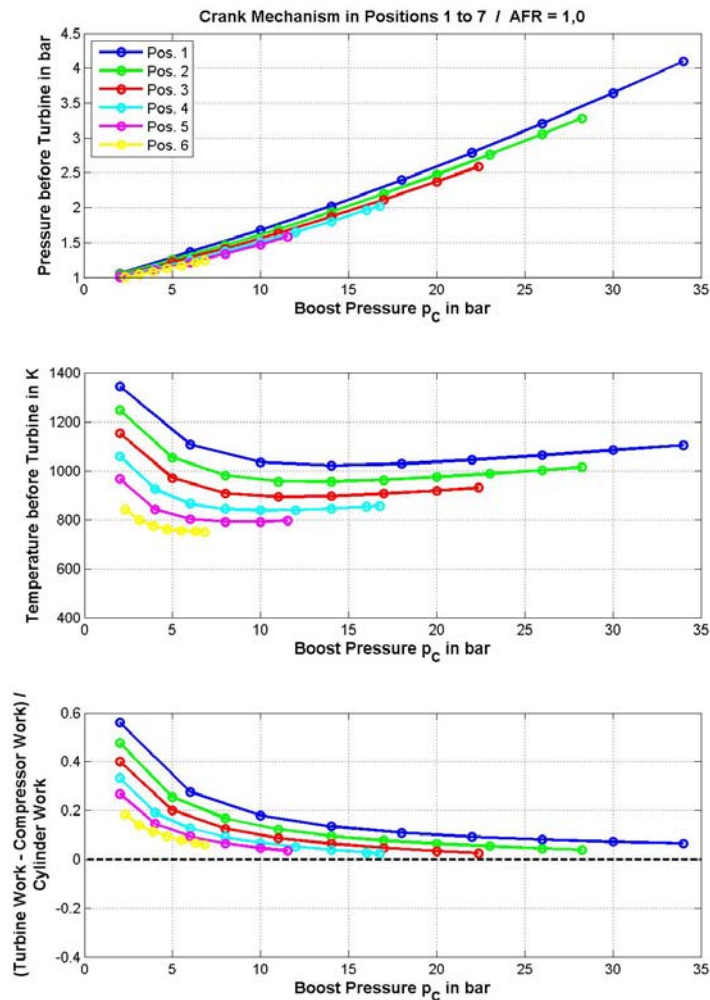

**Figure 17.**  $p_T$ -,  $T_T$ - and RE4T - Boost Pressure Diagram for Seven Crank Mechanism Positions at Full and many Part Loads with Stoichiometric AFR

The question here is whether the exhaust gas energy for turbocharging is sufficient in order to achieve the required high boost pressure. Figure 17 depicts the pressure and temperature of exhaust gases before turbine and the relative energy balance on the turbocharger for stoichiometric AFR. The values of the isentropic efficiency of compressor and turbine used in these simulations are  $\eta_{sc} = 0.75$  and  $\eta_{sT} = 0.65$ .

The relative energy for turbocharging (RE4T) is defined as the quotient of a) the difference of the works of turbine and compressor and b) the piston work on the cycle (all these works are considered positive here). Its variations are depicted in the bottom diagram of Figure 17, where the positive values show that the requirement for turbocharging (see Appendix (8)) is met. The cycles with positive values of RE4T are marked by triangles in Figures 15 and 16. The other cycles (marked by circles) cannot be realized without the use of a supplementary mechanical compressor.

We can conclude that, for the stoichiometric AFR, the exhaust gases have enough energy (i.e. enthalpy) for realizing the necessary boost pressure in all EOP from Figure 15. In the case of  $AFR = 1.5$ , the enthalpy of the exhaust gases is only sufficient for a few points at lower part load (see Fig. 16).

## CONCLUSION

The TCE gain of the Atkinson cycle implementation on aspirated engines – as carried out by Toyota in Prius II - by means of delaying the intake valve closing and by increasing the VCR is modest and largely dependent on the fine-tuning of all control parameters (valve timing etc.). In addition, the specific power of the engine is low because of the lower retained mass of fresh charge in the cylinder before compression. For these reasons, this implementation of the Atkinson cycle is only suitable for hybrid vehicles, where the engine - because it is not directly linked mechanically to the wheels - only works in its best operating range and in combination with an electric motor.

The simulation results for the Atkinson cycle implementation on supercharged engines, where the intake valve closing is  $60^\circ CA$  delayed, shows that although the boost pressure is 40% higher, TCE and IMEP are 6% lower than in the standard version. In addition, the implementation of the Atkinson cycle by means of an important delay of the suction and strong enhancement in the charge pressure is investigated. Although the boost pressure in this Atkinson cycle implementation is more than five times higher at nearly the same IMEP, the TCE improvement is minor.

Consequently, a new approach is needed to implement a real Atkinson cycle on aspirated and supercharged engines. In order to realize a strict Atkinson cycle - i.e. shortened compression and extended expansion - a special crankshaft drive is proposed which permits geometrically different strokes for compression and expansion.

The analysis of the simulation results for the implementation of such Atkinson cycles on aspirated engines with an asymmetrical crank drive shows that a 15% increase in IFCE can be achieved.

In the case of supercharged engines, the number of parameters which influence the TCE becomes increasingly higher. As a result, the effort to achieve combinations of parameters which maximize the TCE of the real ICE cycle becomes much more difficult. For these reasons, ideal models of the  $V_p, T$ -Seiliger and -Atkinson cycles are developed.

The TCE of the Atkinson cycle implemented in supercharged engines with asymmetrical crank drive is more than 25% greater and the IMEP is more than 70% higher than that of the Seiliger cycle, while meeting the same mechanical and thermal limits in both cycles.

The implementation of the Atkinson cycle by means of the asymmetrical crank drive has the disadvantage that at part loads - because of the very extensive expansion - the cycle stops being feasible, i.e. the pressure at the end of expansion becomes lower than the ambient pressure. For this reason, an asymmetrical crank mechanism is needed which also enables the variation of the VCR.

Such a crank mechanism makes it possible to realize Atkinson cycles for part loads even with stoichiometric AFR and without throttling.

## REFERENCES

- (1) Heywood, JB, Internal Combustion Engine Fundamentals, MacGraw-Hill Book Company, 1988
- (2) Pischinger, A, Kraßnig, G, Taucar, G, & Sams, Th., Thermodynamic of Internal Combustion Engines (German), Springer-Verlag, Vienna, New York, 1989
- (3) Muta, K., Yamazaki, M. Tokieda, J., Development of New-Generation Hybrid System THS II - Drastic Improvement of Power Performance and Fuel Economy, SAE 2004-01-0064 and Toyota Hybrid System (THS) II, Toyota Motor Corporation, Public Affairs Division, Japan, 2003
- (4) Gheorghiu, V, Enhancement Potential of the Thermal Efficiency of ICE Cycles Especially for Use into Hybrid Vehicle, HEFAT 2007, 5th International Conference on Heat Transfer, Fluid Mechanics and Thermodynamics, Paper number: GV1, July 2007, Sun City, South Africa
- (5) Gheorghiu, V, Higher Accuracy through Combining of quasi-3D (instead of 1D) with true-3D Manifold Flow Models during the Simulation of ICE Gas Exchange Processes, 2001-01-1913, SAE Congress, Orlando, Florida, USA, 2001
- (6) Gheorghiu, V, Simulation Results of Compressible Unsteady Flows Through ICE Manifolds, F2004F427, FISITA Congress, Barcelona, Spain, 2004
- (7) Schutting, E, Neureiter, A, Fuchs, Ch., Schwarzenberger, T, Klell, M, Eichseder, H, Kammerdiener, T, Miller- and Atkinson-Cycle for Supercharged Diesel Engines, MTZ 06 / 2007 (German)
- (8) Gheorghiu, V, CO<sub>2</sub>-Emission Reduction by means of Enhanced Thermal Conversion Efficiency of ICE Cycles, ICE200 09ICE-0130 / SAE 2009-24-0081, ICE, Naples

## ABBREVIATIONS

<b>AFR</b>	Air-Fuel Ratio
<b>CA</b>	Crank Angle
<b>EOP</b>	Engine Operating Point
<b>ICE</b>	Internal Combustion Engine
<b>IFCE</b>	Indicated Fuel Conversion Efficiency
<b>IMEP</b>	Indicated Mean Pressure
<b>RE4T</b>	Relative Energy for Turbocharging
<b>SI</b>	Spark Ignition Engine
<b>TCE</b>	Thermal Conversion Efficiency
<b>VCR</b>	Volumetric Compression Ratio
<b>SV</b>	Standard Variant for Aspirated Engine
<b>2V</b>	Second Variant for Aspirated Engine
<b>3V</b>	Third Variant for Aspirated Engine
<b>1V-TC</b>	First Variant for Turbo Charged Engine
<b>2V-TC</b>	Second Variant for Turbo Charged Engine
<b>io</b>	Intake Valve Open
<b>ic</b>	Intake Valve Close
<b>eo</b>	Exhaust Valve Open
<b>ec</b>	Exhaust Valve Close